

PTE40L-2748

INTRODUCTION



NOBLELIFT

ENTRY LEVEL
LONG-TILLER ELECTRIC
PALLET TRUCK



4000 LBS

ADVANTAGES

- Ergonomic, Compact and Safe Long Tiller Design
- High Performance Maintenance-free AC Drive Unit
- Bigger Ground Clearance for Tough-ground Applications
- Competitive Cost with Excellent Performance



Distinguishing mark

1.2	Manufacturer's type designation		PTE40L-2748
1.3	Power(battery,diesel,petrol gas,manual)		Battery
1.4	Operator type		pedestrian
1.5	Load Capacity / rated load	Q (lbs)	4000
1.6	Load centre distance	C (in)	24
1.8	Load distance, centre of drive axle to fork	X (in)	37.3 ¹⁾
1.9	Wheelbase	y (in)	53.5 ¹⁾

Weight

2.1	Service weight	lbs	913
2.2	Axle loading, laden front/rear	lbs	1727/3146
2.3	Axle loading, unladen front/ rear	lbs	735/176

Tires, chassis

3.1	Tires		Polyurethane (PU)
3.2	Tire size, front	φx w (in)	8.3X2.8
3.3	Tire size, rear	φx w (in)	2.9X3.9
3.4	Additional wheels (dimensions)	φx w (in)	/
3.5	Wheels, number front/ rear(x=driven wheels)		1x+2
3.6	Tread, front	b10 (in)	22
3.7	Tread, rear	b11 (in)	20.7

Dimensions

4.4	Lift height	h3(in)	4.7
4.9	Height of tiller in drive position min. / max.	h14(in)	30.3/48.4
4.15	Height, lowered	h13(in)	3.0
4.19	Overall length	l1 (in)	68.3
4.20	Length to face of forks	l2 (in)	23.4
4.21	Overall width	b1 (in)	28.7
4.22	Fork dimensions	s/e/l (in)	2 /6.3/48(45.2)
4.25	Distance between fork-arms	b5 (in)	27
4.32	Ground clearance, centre of wheelbase	m2 (in)	1.0
4.34	Aisle width for pallets 1000X1200 lengthways	Ast (in)	89.4
4.35	Turning radius	Wa (in)	60.0 ¹⁾

Performance

5.1	Travel speed, laden/ unladen	mph	3.1/3.3
5.2	Lift speed, laden/ unladen	fpm	4.3/5.9
5.3	Lowering speed, laden / unladen	fpm	5.9/4.5
5.8	Gradeability, laden/ unladen	%	8/12
5.10	Service brake		Electromagnetic

Motors

6.1	Drive motor rating S2 60min	HP	1
6.2	Lift motor rating at S3 10%	HP	1.1
6.3	Battery acc. to DIN 43531 /35 / 36 A, B, C, no		/
6.4	Battery voltage, nominal capacity K5	V/Ah	24/160
6.5	Battery weight (minimum)	lbs	330
8.1	Type of drive control		AC -Speed Control
8.4	Sound level at driver's ear acc. to EN 12053	dB(A)	69

1) Load section lowered: 2.5in



Special design

Special design for fork tip with 3 entry rollers and 4 exit rollers for easy entry and exit of the pallet, esp. when the pallet is empty or light loaded.



Built-in Charger

The built-in charger is located above the battery, easy charging after opening the battery cover.



Creep Button

Creep/Slow speed button for safe and easy operation esp. in confined spaces such as steering in the trailer.




Big capacity Maintenance-free Battery

Equipped with 160Ah maintenance-free battery, with working time 12hours according to the VDI calculation, or for continuous work of 7 hours. There are many advantages comparing to Lead-acid battery:
 No acid refilling maintenance
 Less cable corrosion with the connection pile head
 More protection on over-charging
 Bigger initiating current
 Longer electricity storage time
 More environment-friendly





Bigger ground clearance

Bigger ground clearance, for easy operation for uneven grounds with potholes or small obstacles such as small thresholds or on trailers with lifting gates.

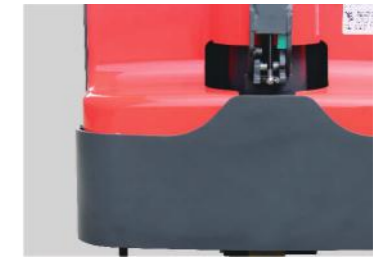

Robust and Reliable Design

The robust chassis with the strong 8mm thick apron protects the truck and the components against mechanical impacts from the outside. The steel battery cover ensures the battery well protected. IP54 protection for the controller for safe operation for delivery applications where the dust and water droplets is common.

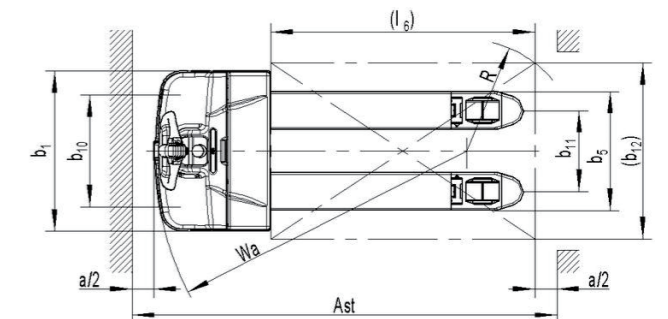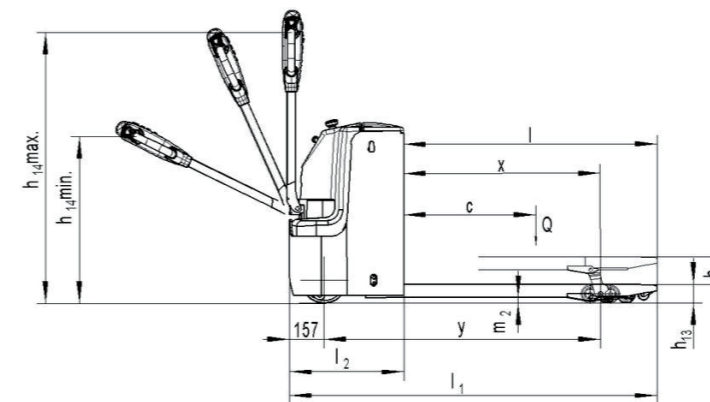

AUTHORIZED DEALER



SJF MATERIAL HANDLING

211 Baker Avenue W, Winsted, MN 55395
 (320) 485-4974 | (800) 598-5532
onlinesales@sjf.com | www.sjf.com